

CS 268: Lecture 13
QoS: DiffServ and IntServ

Ion Stoica
Computer Science Division
Department of Electrical Engineering and Computer Sciences
University of California, Berkeley
Berkeley, CA 94720-1776

1

Quality of Service

- Traditional Internet gives single class of best-effort service
 - Even though ToS bits were included in the original IP header
- Treats all packets the same
 - All customers
 - All applications
- Should Internet give better quality service to some packets?
 - Why?
 - Why not?

2

Three Relevant Factors

- Application performance
- Bandwidth required to provide performance
- Complexity/cost of required mechanisms

3

Providing Better Service

- Routing or Forwarding
- Scheduling or Dropping
- Relative or Absolute

4

Relative QoS


- Priority scheduling
 - Favored packets get lower delay and lower drop rate
- Priority dropping
 - All sent packets get same average delay
- Why bother with priority dropping?

5





Differentiated Services (DiffServ)

- Goal: offer different levels of service
 - Organized around domains
 - Edge and core routers
- Edge routers
 - Sort packets into classes (based on variety of factors)
 - Police/shape traffic
 - Set bits (DSCP) in packet header
- Core routers
 - Handle packet (PHB) based on DSCP

6

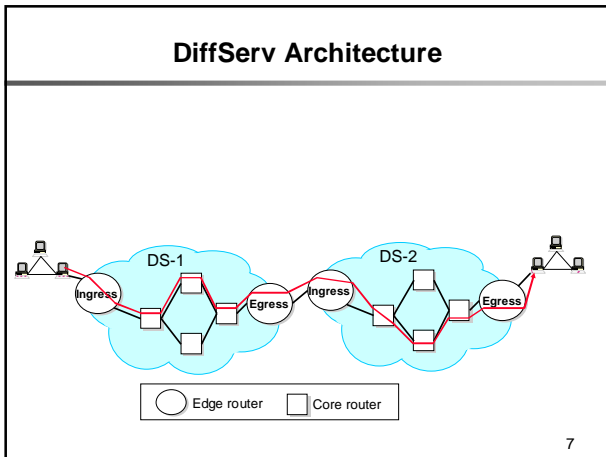


- ### Traffic Policing/Shaping
- Token bucket (r,b)
 - Police: if token is available, packet is considered "in"
 - Otherwise considered "out"
 - Shape: packet is delayed until token is available
- 8

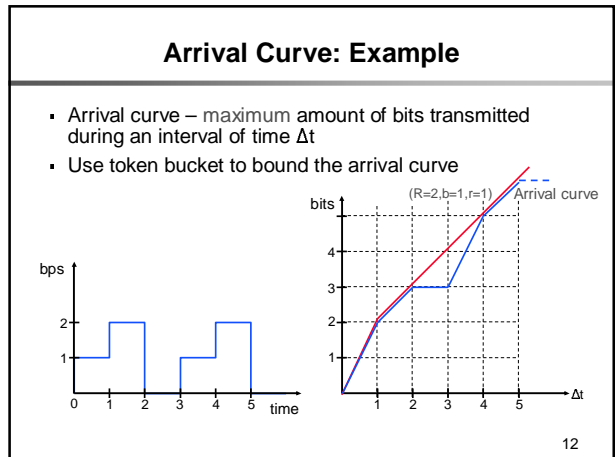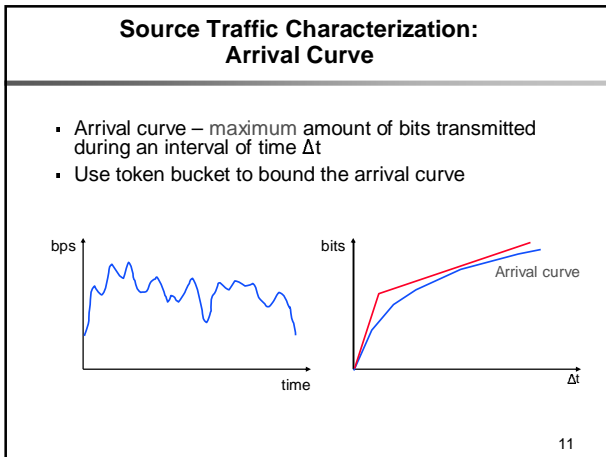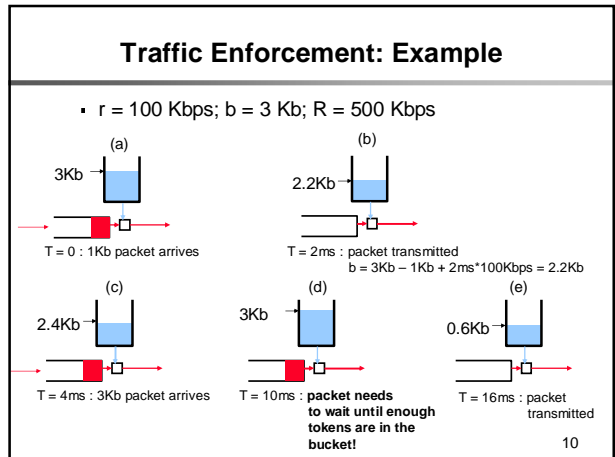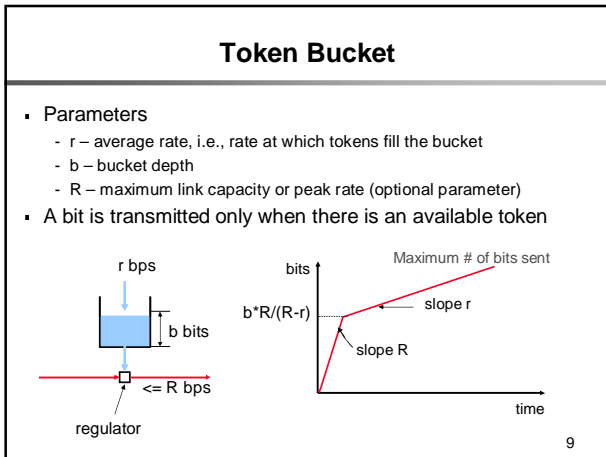

QoS Guarantees: Per-hop Reservation


- End-host: specify
 - the arrival rate characterized by token-bucket with parameters (b, r, R)
 - the maximum maximum admissible delay D , no losses
- Router: allocate bandwidth r_a and buffer space B_a such that
 - no packet is dropped
 - no packet experiences a delay larger than D



13

Implementing Drop Priority

- RED in/out (RIO)
 - Separate dropping curves for in and out traffic
 - Out curve measures all packets
 - In curve measures only in packets

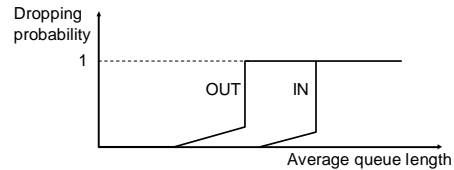

14


Sender and Receiver Versions

- Sender-based version:
 - Sender (or token bucket next to sender) sets in/out bits
 - Routers service with priority
- Receiver-based version: use ECN
 - Put incoming packets through token bucket
 - If packet is "in", cancel any ECN bits
 - Receiver only told about congestion for "out" packets

15

Combining Drop and Delay Priority

- Delay priority traffic gets high forwarding priority
- Drop priority traffic uses RIO



16

Why Does Giving Priority Help?

- Making service for one class of traffic better means that service for another class of traffic must get worse
- Why does that help?

17


From Relative to Absolute Service

- Priority mechanisms can only deliver absolute assurances if total load is regulated
- Service Level Agreements (SLAs) specify:
 - Amount user (organization, etc.) can send
 - Level of service delivered to that traffic
- Premium Service (DiffServ) offers low (unspecified) delay and no drops
 - Acceptance of proposed SLAs managed by "Bandwidth Broker"
 - Only over long time scales

18

Providing Assurances


- SLAs are typically defined without restriction on destination
- Can't provision network efficiently, but may not matter



19

Inter-Domain Premium DiffServ

- Achieve end-to-end bandwidth guarantee
- But is this done for all paths?



20

From DiffServ to IntServ

- Can easily provide some traffic better service than others
 - Making absolute assurances requires controlling load
- DiffServ worst-case provisioning very inefficient
 - Based on aggregate offered load, not for a specific path
- What about fine-grain assurances about QoS?
 - Per-flow, not per traffic class
- Requires admission control for each flow
 - E.g., reservations

21

Major Philosophical Change

- Per-flow admission control is drastic change to the Internet
 - But best-effort still available (used for most traffic)
- We will first discuss whether this is a good idea
 - Going back to basics about application performance, etc.
- We will then talk about how one might do this
 - cursory overview, because details are in the dustbin of history

22

Reservations or Best-Effort

- Basic question:
 - Should we admit all flows (BE), or
 - Refuse some to preserve good service for current flows (R)
- Precedents:
 - The telephone network uses admission control
 - The current Internet does not
- Which one is right? Huge ideological battle!!
- How can we decide?
 - Which provides better application performance?

23

Modeling Application Performance

- Not a simple function of delay/jitter/loss
- Depends on user perception
 - e.g., picture quality, etc.
- Depends on adaptive application behavior
 - Adjust sending rate
 - Adjust coding (to mask errors)
 - Adjust "playback point" (later)
- For a given application, can describe performance as a function of available bandwidth

24

Classes of Application

- Traditional data applications: "elastic"
 - Tolerant of delay
 - Tolerant of loss
- Streaming media applications: "real-time"
 - Less tolerant of delay
 - Less tolerant of loss
 - Often of the "playback" variety

25

Playback Applications

- Video/audio stream being sent
- "Played back" at receiver
- Receiver picks time to play back content
 - "playback point"
- Playback point:
 - Moves: distortion
 - Late: delay
 - Misses packets: "drops"

26

The Overprovisioning Debate

- Some claim bandwidth is plentiful everywhere
 - Cheap
 - Or needed for fail-over
- But that's within core of ISPs
- Bandwidth is scarce:
 - At edge
 - Between providers
- Intserv would help pay for bandwidth in those places

27

IntServ

- IntServ = Integrated Services Internet
- Goal: support wider variety of services in single architecture
- Effort largely led by PARC, MIT, USC/ISI

28


Key IntServ Design Decisions

- Reservations are made by endpoints
 - Network is not making guesses about application requirements
- IntServ is multicast-oriented
 - Assumed that large broadcasts would be a driver of both IntServ and multicast
 - Reservations made by receivers
- Soft-state: state in routers always refreshed by endpoints
- Service guarantees are end-to-end on a per-flow basis

29

Integrated Services Internet

- Flow is QoS abstraction
- Each flow has a fixed or stable path
- Routers along the path maintain state for the flow
- State is used to deliver appropriate service



30

IntServ Mechanisms

- Reservation protocol: transmits service request to network
 - TSpec: traffic description
 - RSpec: service description
- Admission control: determines whether to accept request
- Packet scheduling: ensures router meets service reqmts
- Routing: pin routes, look for resource-rich routes


31

IntServ Services

- Kinds of service assurances:
 - Guaranteed (never fails unless major failure)
 - Predictive (will almost never fail)
- Corresponding admission control:
 - Guaranteed: worst-case
 - No guessing about traffic
 - Predictive: measurement-based
 - Gamble on aggregate behavior changing slowly

32


Integrated Services Example

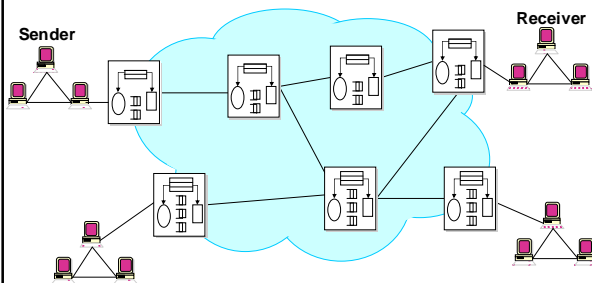

33

Integrated Services Example


- Allocate resources - perform per-flow admission control

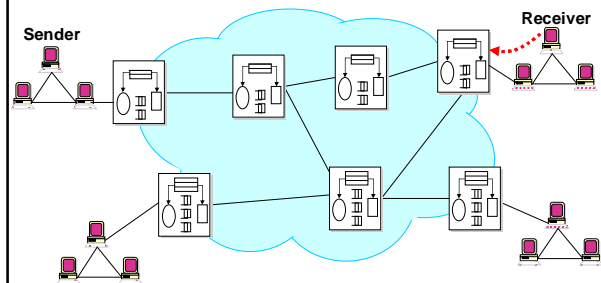

34

Integrated Services Example


- Install per-flow state

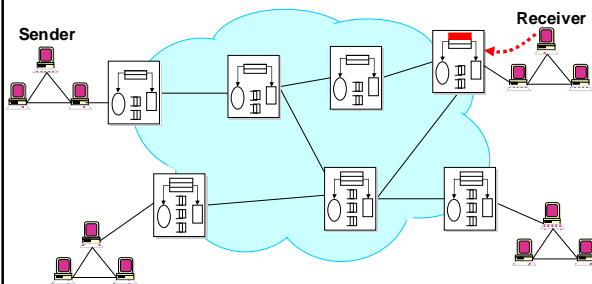





35

Integrated Services Example

- Install per flow state

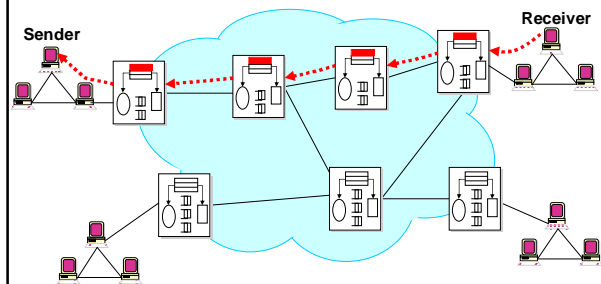


36

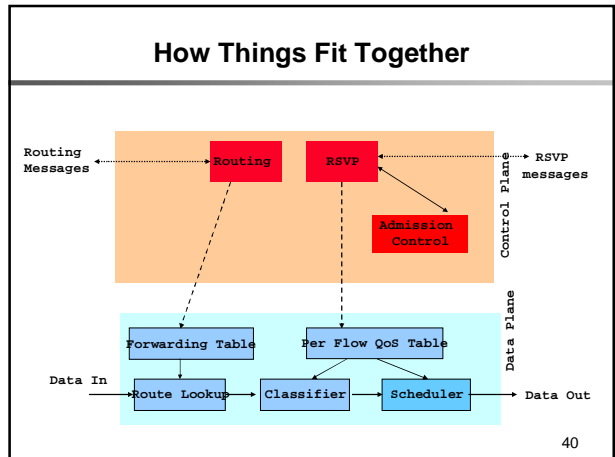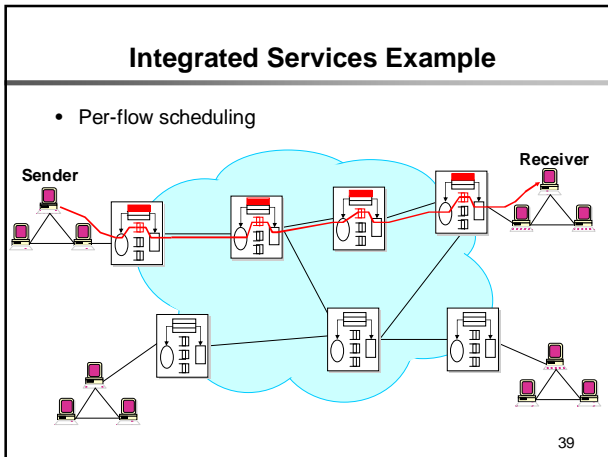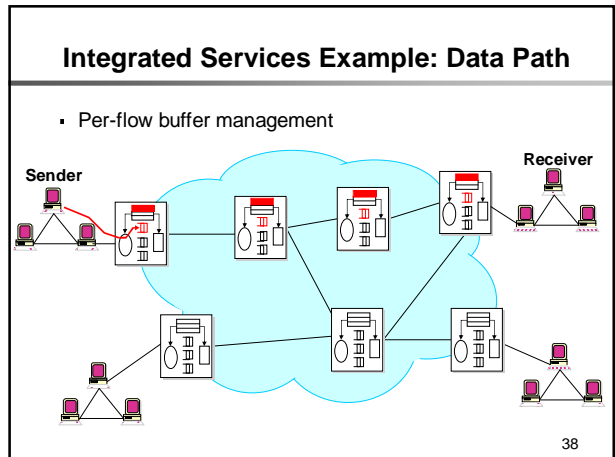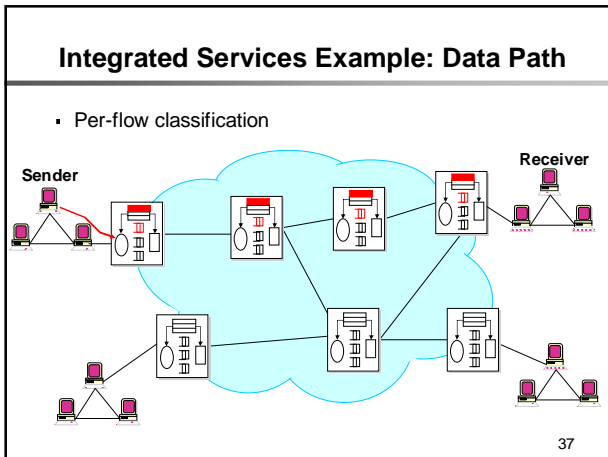


RSVP Reservation Protocol

- Performs signaling to set up reservation state for a session
- A session is a simplex data flow sent to a unicast or a multicast address, characterized by
 - <IP dest, protocol number, port number>
- Multiple senders and receivers can be in same session

41

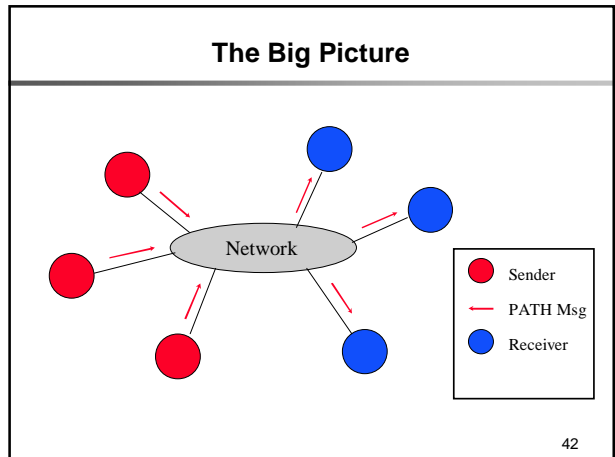

The Big Picture (2)

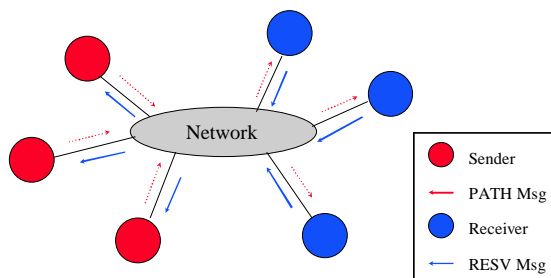

43


RSVP Basic Operations

- Sender: sends PATH message via the data delivery path
 - Set up the path state each router including the address of previous hop
- Receiver sends RESV message on the reverse path
 - Specifies the reservation style, QoS desired (RSpec)
 - Set up the reservation state at each router
- Things to notice
 - Receiver initiated reservation
 - Decouple routing from reservation

44

Route Pinning

- Problem: asymmetric routes
 - You may reserve resources on $R \rightarrow S3 \rightarrow S5 \rightarrow S4 \rightarrow S1 \rightarrow S$, but data travels on $S \rightarrow S1 \rightarrow S2 \rightarrow S3 \rightarrow R$!
- Solution: use PATH to remember direct path from S to R, i.e., perform route pinning

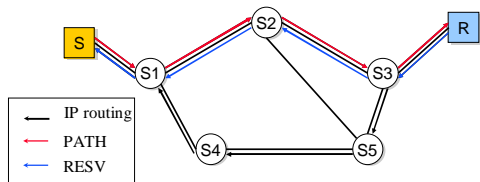

45

PATH and RESV messages

- PATH also specifies
 - Source traffic characteristics
 - Use token bucket
- RESV specifies
 - Service requirements
 - Source traffic characteristics (from PATH)
 - Filter specification, i.e., what senders can use reservation
 - Based on these routers perform reservation

46

Reservation Style

- Motivation: achieve more efficient resource
- Observation: in a video conferencing when there are M senders, only a few are active simultaneously
 - Multiple senders can share the same reservation
- Various reservation styles specify different rules for sharing among senders
- Key distinction:
 - Reserved resources (bandwidth)
 - Which packets use those resources

47

Reservation Styles: Filters

- Wildcard filter: all session packets share resources
 - Good for small number of simultaneously active senders
- Fixed filter: no sharing among senders, sender explicitly identified in reservation
 - Sources cannot be modified over time
 - Allows reserved resources to be targeted to particular paths
- Dynamic filter: resource shared by senders that are (explicitly) specified
 - Sources can be modified over time
 - Switching between speakers at a conference

48

What Did We Miss?

- Make aggregation central to design
 - In core, don't want to keep track of each flow
 - Don't want to process each RESV message
- Economics: user/provider and provider/provider
 - We talked about it (at great length) but didn't realize how inflexible the providers would be
- Too complicated: filter styles a waste of time
- Multicast focus?

49