

CS162

Operating Systems and Systems Programming

Lecture 3

Concurrency: Processes, Threads, and Address Spaces

September 8, 2008

Prof. John Kubiatowicz

<http://inst.eecs.berkeley.edu/~cs162>

Review: History of OS


- Why Study?
 - To understand how user needs and hardware constraints influenced (and will influence) operating systems
- Several Distinct Phases:
 - Hardware Expensive, Humans Cheap
 - » Eniac, ... Multics
 - Hardware Cheaper, Humans Expensive
 - » PCs, Workstations, Rise of GUIs
 - Hardware Really Cheap, Humans Really Expensive
 - » Ubiquitous devices, Widespread networking
- Rapid Change in Hardware Leads to changing OS
 - Batch ⇒ Multiprogramming ⇒ Timeshare ⇒ Graphical UI ⇒ Ubiquitous Devices ⇒ Cyberspace/Metaverse/??
 - Gradual Migration of Features into Smaller Machines
- Situation today is much like the late 60s
 - Small OS: 100K lines/Large: 10M lines (5M browser!)
 - 100-1000 people-years

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.2

Review: Migration of OS Concepts and Features

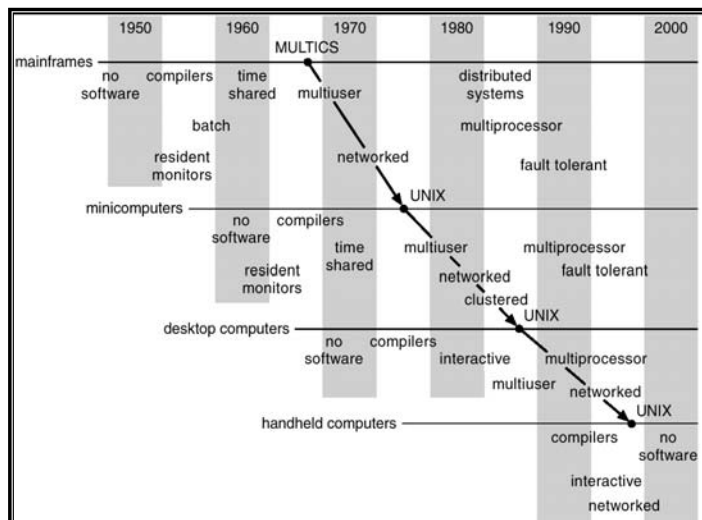

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.3

Review: Implementation Issues (How is the OS implemented?)

- Policy vs. Mechanism
 - Policy: **What** do you want to do?
 - Mechanism: **How** are you going to do it?
 - Should be separated, since policies change
- Algorithms used
 - Linear, Tree-based, Log Structured, etc...
- Event models used
 - threads vs event loops
- Backward compatibility issues
 - Very important for Windows 2000/XP/Vista/...
 - POSIX tries to help here
- System generation/configuration
 - How to make generic OS fit on specific hardware

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.4

Goals for Today

- How do we provide multiprogramming?
- What are Processes?
- How are they related to Threads and Address Spaces?

Note: Some slides and/or pictures in the following are adapted from slides ©2005 Silberschatz, Galvin, and Gagne. Many slides generated from my lecture notes by Kubiawicz.

9/8/07

Kubiawicz CS162 ©UCB Fall 2008

Lec 3.5

Concurrency

- "Thread" of execution
 - Independent Fetch/Decode/Execute loop
 - Operating in some Address space
- Uniprogramming: *one thread at a time*
 - MS/DOS, early Macintosh, Batch processing
 - Easier for operating system builder
 - Get rid concurrency by defining it away
 - Does this make sense for personal computers?
- Multiprogramming: *more than one thread at a time*
 - Multics, UNIX/Linux, OS/2, Windows NT/2000/XP, Mac OS X
 - Often called "multitasking", but multitasking has other meanings (talk about this later)
- ManyCore ⇒ Multiprogramming, right?

9/8/07

Kubiawicz CS162 ©UCB Fall 2008

Lec 3.6

The Basic Problem of Concurrency


- The basic problem of concurrency involves resources:
 - Hardware: single CPU, single DRAM, single I/O devices
 - Multiprogramming API: users think they have exclusive access to shared resources
- OS Has to coordinate all activity
 - Multiple users, I/O interrupts, ...
 - How can it keep all these things straight?
- Basic Idea: Use Virtual Machine abstraction
 - Decompose hard problem into simpler ones
 - Abstract the notion of an executing program
 - Then, worry about multiplexing these abstract machines
- Dijkstra did this for the "THE system"
 - Few thousand lines vs 1 million lines in OS 360 (1K bugs)

9/8/07

Kubiawicz CS162 ©UCB Fall 2008

Lec 3.7

Recall (61C): What happens during execution?

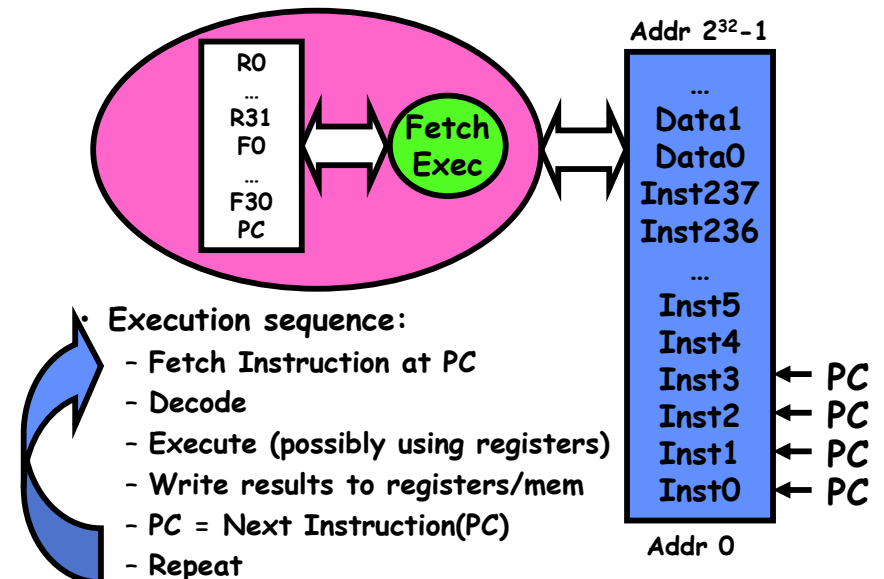


9/8/07

Kubiawicz CS162 ©UCB Fall 2008

Lec 3.8

How can we give the illusion of multiple processors?

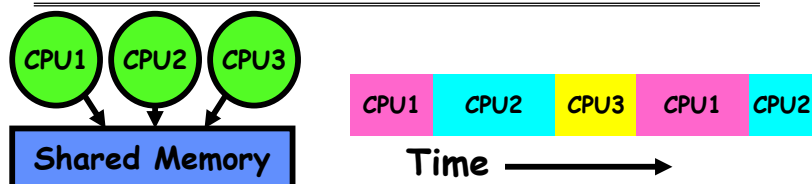

- Assume a single processor. How do we provide the illusion of multiple processors?
 - Multiplex in time!
- Each virtual "CPU" needs a structure to hold:
 - Program Counter (PC), Stack Pointer (SP)
 - Registers (Integer, Floating point, others...?)
- How switch from one CPU to the next?
 - Save PC, SP, and registers in current state block
 - Load PC, SP, and registers from new state block
- What triggers switch?
 - Timer, voluntary yield, I/O, other things

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.9

Properties of this simple multiprogramming technique

- All virtual CPUs share same non-CPU resources
 - I/O devices the same
 - Memory the same
- Consequence of sharing:
 - Each thread can access the data of every other thread (good for sharing, bad for protection)
 - Threads can share instructions (good for sharing, bad for protection)
 - Can threads overwrite OS functions?
- This (unprotected) model common in:
 - Embedded applications
 - Windows 3.1/Machintosh (switch only with yield)
 - Windows 95—ME? (switch with both yield and timer)


9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.10

Modern Technique: SMT/Hyperthreading

- Hardware technique
 - Exploit natural properties of superscalar processors to provide illusion of multiple processors
 - Higher utilization of processor resources
- Can schedule each thread as if were separate CPU
 - However, not linear speedup!
 - If have multiprocessor, should schedule each processor first
- Original technique called "Simultaneous Multithreading"
 - See <http://www.cs.washington.edu/research/smt/>
 - Alpha, SPARC, Pentium 4 ("Hyperthreading"), Power 5

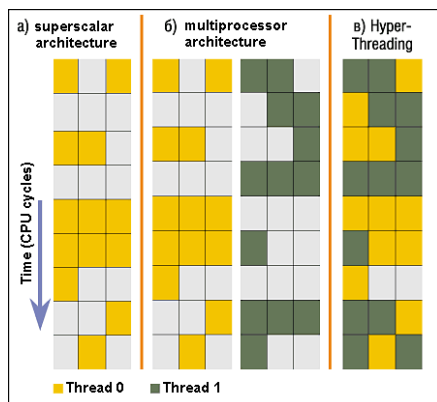

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.11

Administrivia: Second Try for Project Signup

- Still working on section assignments
- Wednesday 2-3 oversubscribed
 - Thinking of trying to:
 - » add Wednesday 1-2
 - » remove Tuesday 1-2
 - Would this help?
- Also, some people signed up twice
- Some people didn't sign up at all
- Try again?
- Project Signup: "Group/Section Assignment Link"
 - Due date: Tomorrow (9/9) by 11:59pm
- Sections:
 - Go to Telebears-assigned Section this week (Tue/Wed)

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.12

Administrivia (2)

- Cs162-xx accounts:
 - Make sure you got an account form
 - If you haven't logged in yet, you need to do so
- Email addresses
 - We need an email address from you
 - If you haven't given us one already, you should get prompted when you log in again (or type "register")
- Wednesday: Start Project 1
 - Go to Nachos page and start reading up
 - Note that all the Nachos code will be printed in your reader (TBA)

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.13

How to protect threads from one another?

- Need three important things:
 1. Protection of memory
 - » Every task does not have access to all memory
 2. Protection of I/O devices
 - » Every task does not have access to every device
 3. Preemptive switching from task to task
 - » Use of timer
 - » Must not be possible to disable timer from usercode


9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.14

Recall: Program's Address Space

- Address space \Rightarrow the set of accessible addresses + state associated with them:
 - For a 32-bit processor there are $2^{32} = 4$ billion addresses
- What happens when you read or write to an address?
 - Perhaps Nothing
 - Perhaps acts like regular memory
 - Perhaps ignores writes
 - Perhaps causes I/O operation
 - » (Memory-mapped I/O)
 - Perhaps causes exception (fault)

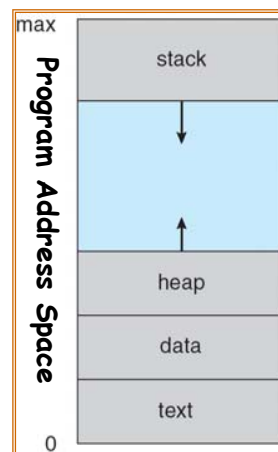


9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.15

Providing Illusion of Separate Address Space: Load new Translation Map on Switch

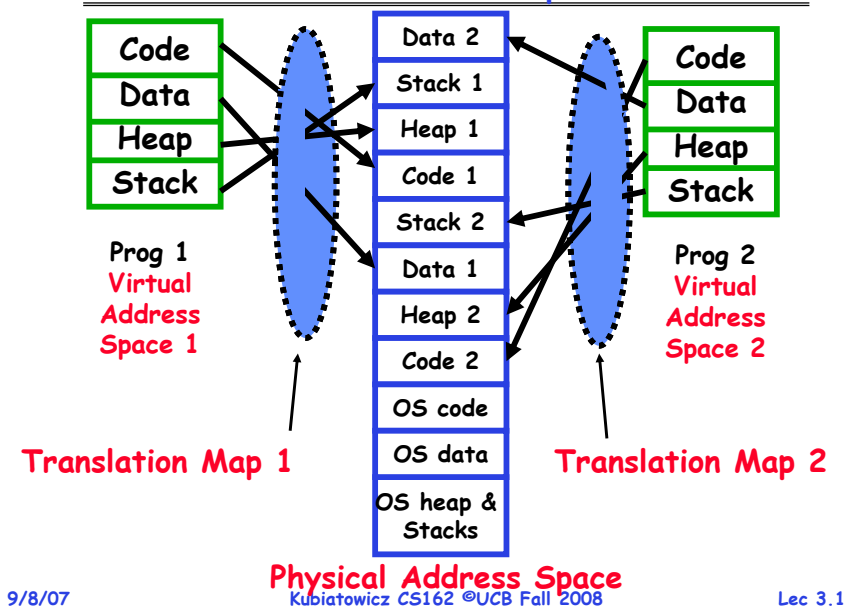

9/8/07

Physical Address Space
Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.16

Traditional UNIX Process

- **Process: Operating system abstraction to represent what is needed to run a single program**
 - Often called a "HeavyWeight Process"
 - Formally: a single, sequential stream of execution in its *own* address space
- **Two parts:**
 - Sequential Program Execution Stream
 - » Code executed as a *single, sequential* stream of execution
 - » Includes State of CPU registers
 - Protected Resources:
 - » Main Memory State (contents of Address Space)
 - » I/O state (i.e. file descriptors)
- **Important: There is no concurrency in a heavyweight process**


9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.17

How do we multiplex processes?

- The current state of process held in a process control block (PCB):
 - This is a "snapshot" of the execution and protection environment
 - Only one PCB active at a time
- Give out CPU time to different processes (**Scheduling**):
 - Only one process "running" at a time
 - Give more time to important processes
- Give pieces of resources to different processes (**Protection**):
 - Controlled access to non-CPU resources
 - Sample mechanisms:
 - » Memory Mapping: Give each process their own address space
 - » Kernel/User duality: Arbitrary multiplexing of I/O through system calls

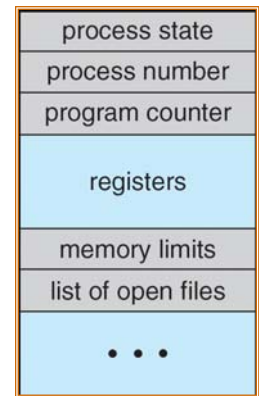


Process Control Block

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.18

CPU Switch From Process to Process

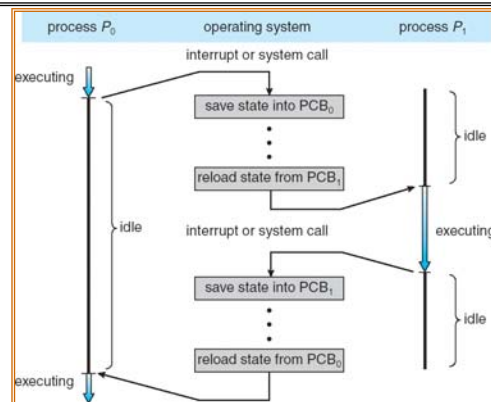


- This is also called a "context switch"
- Code executed in kernel above is overhead
 - Overhead sets minimum practical switching time
 - Less overhead with SMT/hyperthreading, but... contention for resources instead

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.19

Diagram of Process State

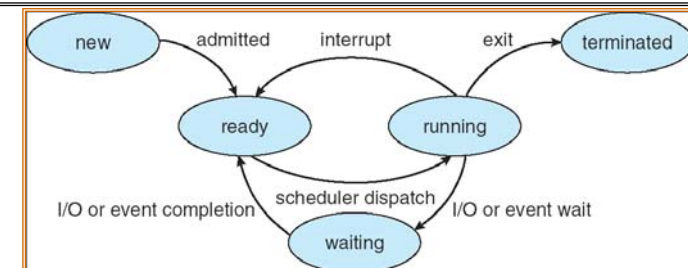


- As a process executes, it changes *state*
 - **new**: The process is being created
 - **ready**: The process is waiting to run
 - **running**: Instructions are being executed
 - **waiting**: Process waiting for some event to occur
 - **terminated**: The process has finished execution

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.20

Process Scheduling

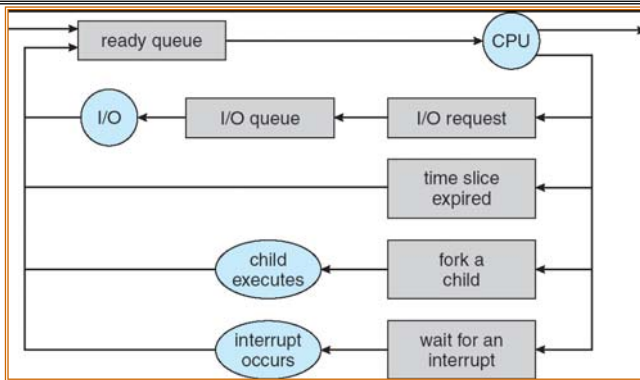

- PCBs move from queue to queue as they change state
 - Decisions about which order to remove from queues are **Scheduling** decisions
 - Many algorithms possible (few weeks from now)

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.21

What does it take to create a process?

- **Must construct new PCB**
 - Inexpensive
- **Must set up new page tables for address space**
 - More expensive
- **Copy data from parent process? (Unix fork())**
 - Semantics of Unix fork() are that the child process gets a complete copy of the parent memory and I/O state
 - Originally *very* expensive
 - Much less expensive with "copy on write"
- **Copy I/O state (file handles, etc)**
 - Medium expense

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.22


Process =? Program

```
main ()
{
  ...;
}
A() {
  ...
}
```

Program

```
main ()
{
  ...;
}
A() {
  ...
}
```

Process




- **More to a process than just a program:**
 - Program is just part of the process state
 - I run emacs on lectures.txt, you run it on homework.java - Same program, different processes
- **Less to a process than a program:**
 - A program can invoke more than one process
 - cc starts up cpp, cc1, cc2, as, and ld

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.23

Multiple Processes Collaborate on a Task

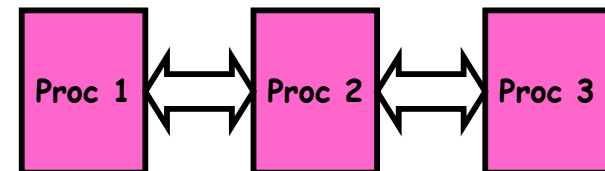


- **High Creation/memory Overhead**
- **(Relatively) High Context-Switch Overhead**
- **Need Communication mechanism:**
 - **Separate Address Spaces Isolates Processes**
 - **Shared-Memory Mapping**
 - » Accomplished by mapping addresses to common DRAM
 - » Read and Write through memory
 - **Message Passing**
 - » send() and receive() messages
 - » Works across network

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.24

Shared Memory Communication

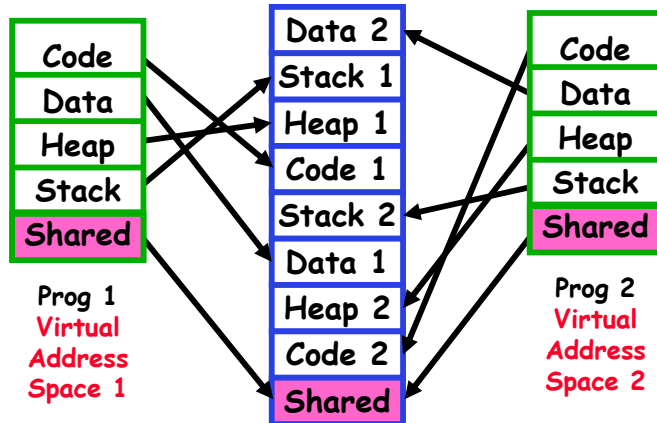

- Communication occurs by “simply” reading/writing to shared address page
 - Really low overhead communication
 - Introduces complex synchronization problems

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.25

Inter-process Communication (IPC)

- Mechanism for processes to communicate and to synchronize their actions
- Message system - processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
 - `send(message)` - message size fixed or variable
 - `receive(message)`
- If P and Q wish to communicate, they need to:
 - establish a *communication link* between them
 - exchange messages via `send/receive`
- Implementation of communication link
 - physical (e.g., shared memory, hardware bus, syscall/trap)
 - logical (e.g., logical properties)

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.26

Modern “Lightweight” Process with Threads


- Thread: *a sequential execution stream within process* (Sometimes called a “Lightweight process”)
 - Process still contains a single Address Space
 - No protection between threads
- Multithreading: *a single program made up of a number of different concurrent activities*
 - Sometimes called multitasking, as in Ada...
- Why separate the concept of a thread from that of a process?
 - Discuss the “thread” part of a process (concurrency)
 - Separate from the “address space” (Protection)
 - Heavyweight Process \equiv Process with one thread

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.27

Single and Multithreaded Processes

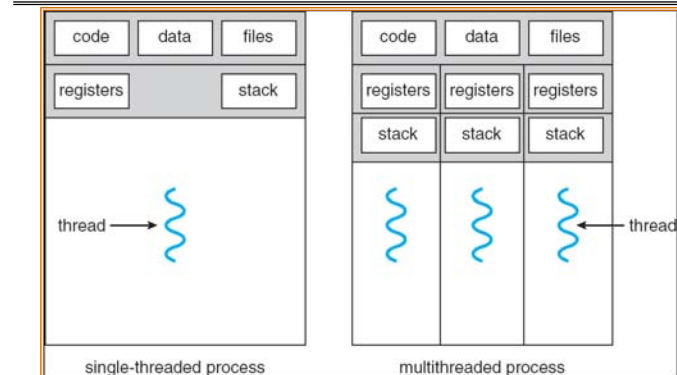

- Threads encapsulate concurrency: “Active” component
- Address spaces encapsulate protection: “Passive” part
 - Keeps buggy program from trashing the system
- Why have multiple threads per address space?

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.28

Examples of multithreaded programs

- **Embedded systems**
 - Elevators, Planes, Medical systems, Wristwatches
 - Single Program, concurrent operations
- **Most modern OS kernels**
 - Internally concurrent because have to deal with concurrent requests by multiple users
 - But no protection needed within kernel
- **Database Servers**
 - Access to shared data by many concurrent users
 - Also background utility processing must be done

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.29

Examples of multithreaded programs (con't)

- **Network Servers**
 - Concurrent requests from network
 - Again, single program, multiple concurrent operations
 - File server, Web server, and airline reservation systems
- **Parallel Programming (More than one physical CPU)**
 - Split program into multiple threads for parallelism
 - This is called Multiprocessing
- **Some multiprocessors are actually uniprogrammed:**
 - Multiple threads in one address space but one program at a time

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.30

Thread State

- **State shared by all threads in process/addr space**
 - Contents of memory (global variables, heap)
 - I/O state (file system, network connections, etc)
- **State "private" to each thread**
 - Kept in TCB \equiv Thread Control Block
 - CPU registers (including, program counter)
 - Execution stack - what is this?
- **Execution Stack**
 - Parameters, Temporary variables
 - return PCs are kept while called procedures are executing


9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.31

Execution Stack Example

```
A(int tmp) {
    if (tmp<2)
        B();
    printf(tmp);
}
B() {
    C();
}
C() {
    A(2);
}
A(1);
```



- **Stack holds temporary results**
- **Permits recursive execution**
- **Crucial to modern languages**

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.32

Classification

# threads Per AS:	# of addr spaces:	One	Many
One		MS/DOS, early Macintosh	Traditional UNIX
Many		Embedded systems (Geoworks, VxWorks, JavaOS, etc) JavaOS, Pilot(PC)	Mach, OS/2, Linux Windows 9x??? Win NT to XP, Solaris, HP-UX, OS X

- Real operating systems have either
 - One or many address spaces
 - One or many threads per address space
- Did Windows 95/98/ME have real memory protection?
 - No: Users could overwrite process tables/System DLLs

9/8/07


Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.33

Example: Implementation Java OS

- Many threads, one Address Space
- Why another OS?
 - Recommended Minimum memory sizes:
 - » UNIX + X Windows: 32MB
 - » Windows 98: 16-32MB
 - » Windows NT: 32-64MB
 - » Windows 2000/XP: 64-128MB
 - What if we want a cheap network point-of-sale computer?
 - » Say need 1000 terminals
 - » Want < 8MB
- What language to write this OS in?
 - C/C++/ASM? Not terribly high-level. Hard to debug.
 - Java/Lisp? Not quite sufficient - need direct access to HW/memory management

Java OS
Structure



9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.34

Summary

- Processes have two parts
 - Threads (Concurrency)
 - Address Spaces (Protection)
- Concurrency accomplished by multiplexing CPU Time:
 - Unloading current thread (PC, registers)
 - Loading new thread (PC, registers)
 - Such context switching may be voluntary (`yield()`, I/O operations) or involuntary (timer, other interrupts)
- Protection accomplished restricting access:
 - Memory mapping isolates processes from each other
 - Dual-mode for isolating I/O, other resources
- Book talks about processes
 - When this concerns concurrency, really talking about thread portion of a process
 - When this concerns protection, talking about address space portion of a process

9/8/07

Kubiatowicz CS162 ©UCB Fall 2008

Lec 3.35